


(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number
WO 03/088247 A2

- (51) International Patent Classification⁷: **G11B 20/12**, 20/18, 20/00
- (21) International Application Number: **PCT/IB03/01269**
- (22) International Filing Date: **1 April 2003 (01.04.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
02076518.6 **18 April 2002 (18.04.2002)** **EP**
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]**; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BENTVELSEN, Petrus, H., C. [NL/NL]**; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **VOLLEBREGT, Paulus, F. [NL/NL]**; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: **DEGUELLE, Wilhelmus, H., G.**; internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: READ-ONLY RECORD CARRIER WITH RECORDABLE AREA IN SUBCODE CHANNEL

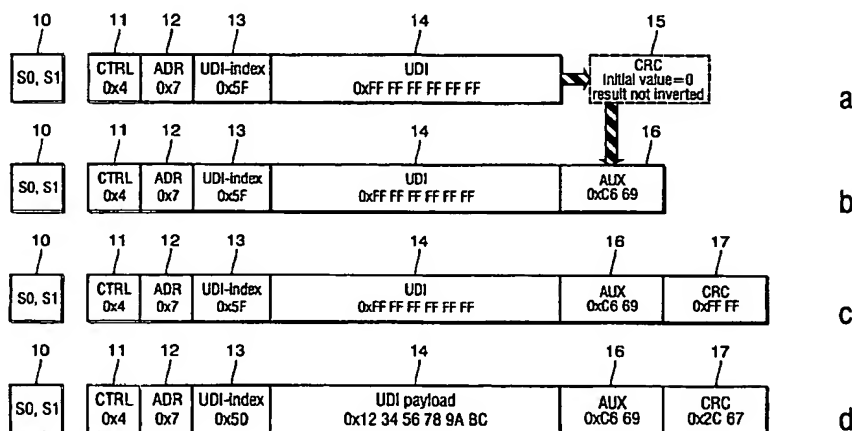

(57) Abstract: The invention relates to a method of providing a read-only record carrier on which user data can be recorded at predetermined recordable positions of subcode frames of a subcode channel after mastering of said record carrier, comprising the steps of: setting the subcode symbols at said predetermined recordable positions to a first predetermined symbol value during mastering, calculating for each subcode frame error detection data over certain subcode data of said subcode frame including said subcode symbols set to said first predetermined symbol value, storing said error detection data at auxiliary data positions in said subcode frame, and setting error detection data positions in said subcode frame to a second predetermined symbol value, said predetermined recordable positions of said subcode frames being provided for recording of user data to it during writing of data and said error detection data positions of said subcode frames being provided for recording correct error detection data calculated after recording said user data to said predetermined recordable positions to it.